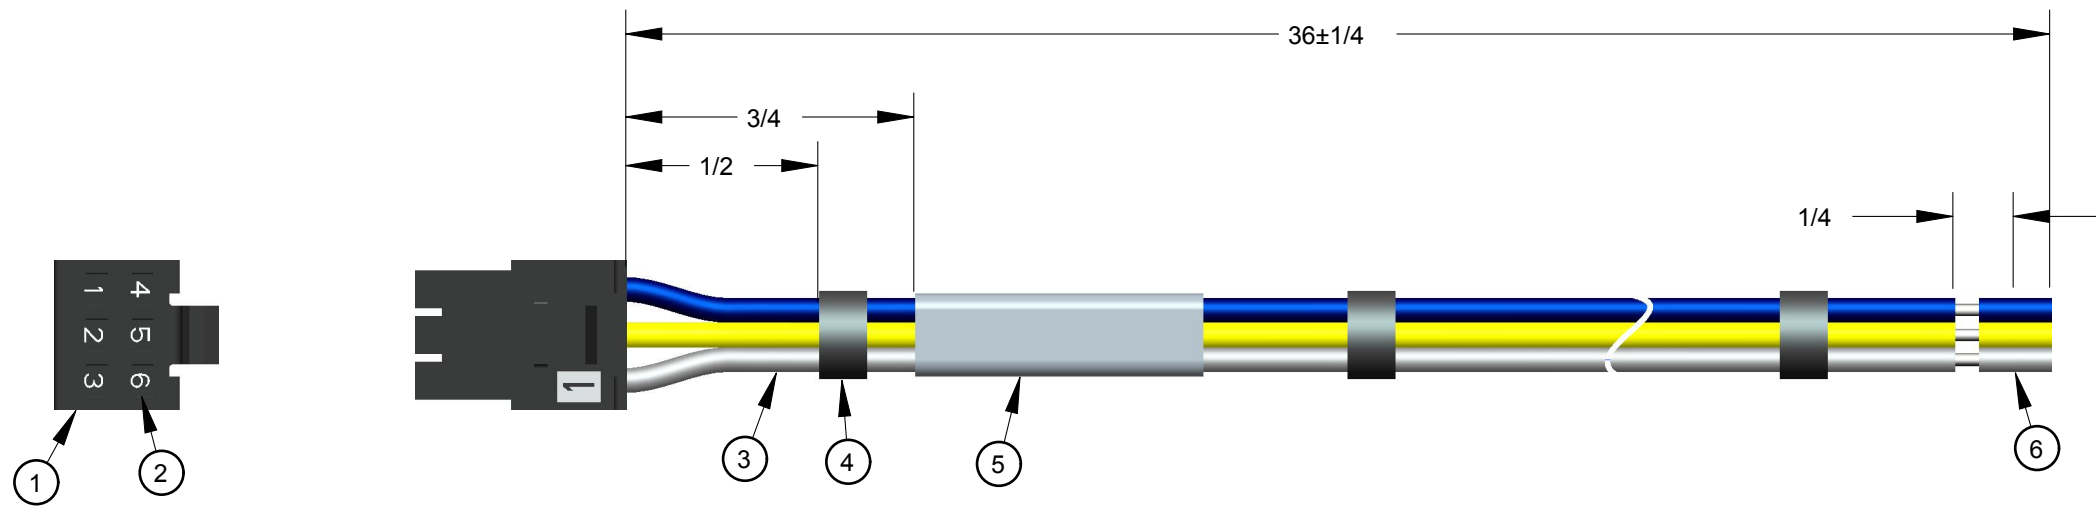




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE PER ECO 13-16882	072413	L. PITZELE
B	ADDED WEIGHT PER ECO 13-17248	10/15/13	DS



NOTES:

- CONNECTOR: MOLEX 43025-0600
- CRIMP TERMINAL: MOLEX 43030 QTY 6
- WIRE: 20AWG (10/30 STRANDING)
INSULATION: UL AWM STYLE 1569 - 300V 105° C / CSA TYPE TRSR-64, 105° C
- CABLE TIE: SPC PN# VUVT-05M-M OR EQUIVALENT, MIN TENSILE STRENGTH 18 lbs. QTY 5 SPACED 6" (PLACEMENT ON DRAWING NOT TO SCALE)
- LABEL: TEXT HAS TO BE LEGIBLE WITH A MINIMUM OF .1" TALL CHARACTER HEIGHT.
LABEL FORMAT:
SynQor
Cable PN/Rev
Date Code (YYWW)
- STRIP-AND-RETAIN WIRE ENDS
- ALL PARTS MUST BE UL REIOWNIZED AND CSA APPROVED.
- ALL PARTS MUST BE ROHS COMPLIANT
- CABLE MANUFACTURER MUST FOLLOW CONNECTOR MANUFACTURER'S CRIMP GUIDELINES
- ALL PARTS/COMPONENTS MUST BE FREE OF DAMAGE AND CUTS
- TOLERANCES +/- 1/8" UNLESS SPECIFIED OTHERWISE.
- WEIGHT: 0.10lb [.045kg]

PIN ASSIGNMENTS			
PIN#	COLOR	NAME	DESCRIPTION
1	GRAY	VOUT+	POWER POSITIVE
2	YELLOW	NC	NOT CONNECTED
3	BLUE	VOUT-	POWER NEGATIVE
4	ORANGE	VSENSE+	SENSE POSITIVE
5	WHITE	TRIM	TRIM PIN
6	BROWN	VSENSE-	SENSE NEGATIVE

TOLERANCES: Unless otherwise specified: All dimensions in inches .X +/- .025 .XX +/- .010 .XXX +/- .005 Angles +/- 1°						155 Swanson Road Boxborough, MA 01719-1316	
				MULTIQOR OUTPUT SIGNAL CONNECTOR			
SOURCE: PRO/E 705-1000119							
SIZE	DATE	DWG. NO.		REV			
B	072413	705-1000119		B			
SCALE: 1.000		DRAWN: LDP		CHECK:	SHEET 1 of 1		

1

2

3

4

1

2

3

4