

1

2

3

4

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
2	DWG MODIFIED PER ECO#07-7464	07/31/07	IS
3	ADD NOTES 6&7 / LABEL FORMAT ECO#07-7661	09/24/07	IS
4	ADD PN FOR CUSTOMER ORDER ECO#07-7714	11/21/07	IS
A	REV CHANGE PER ECO#08-8774	05/21/08	IS
B	ADDED WEIGHT PER ECO 13-17172	9/26/13	JAK

A


A

B

B

C

C

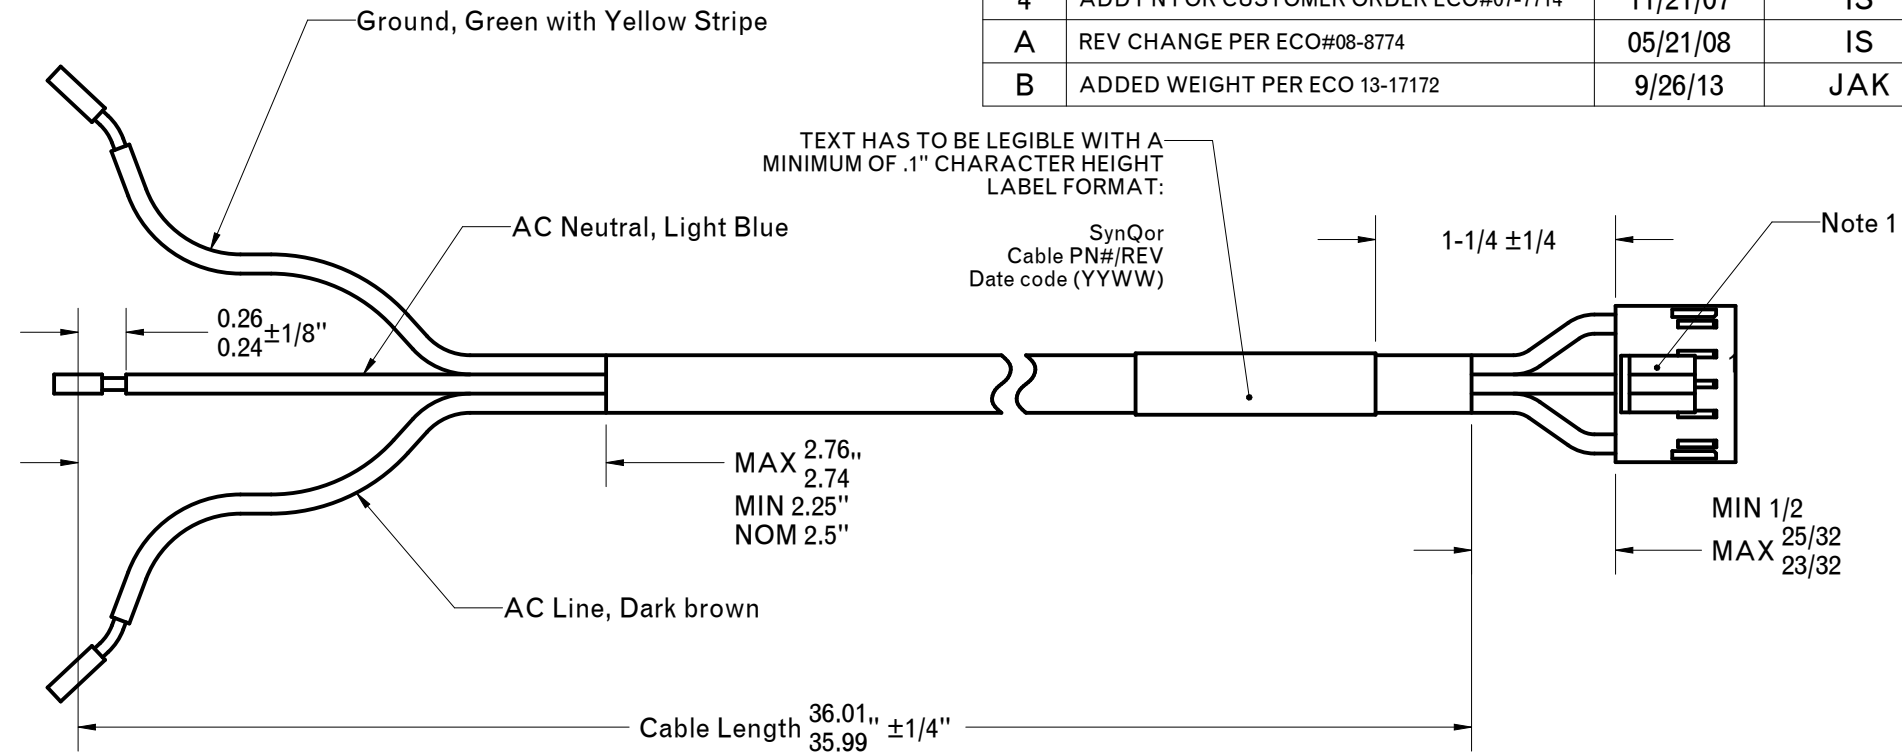


NOTES:

- 1- USE JST CONNECTOR OR EQUIVALENT: VHR-5N WITH JST CRIMP TERMINAL OR EQUIVALENT: SVH-41T-P1.1.
- 2- PIN 1 - GROUND - GREEN WITH YELLOW STRIPE
PIN 3 - AC NEUTRAL - LIGHT BLUE
PIN 5 - AC LINE - DARK BROWN
- 3- CABLE: UL RATED, SJT, 75°C, 18X3
RATING: 1250W, 10A-125V, BLACK
- 4- WIRES MUST BE STRIPPED-AND-RETAINED
- 5- ALL PARTS MUST BE UL RECOGNIZED AND CSA APPROVED
- 6- CABLE MANUFACTURER MUST FOLLOW CONNECTOR MANUFACTURER'S CRIMP GUIDELINES.
- 7- ALL PARTS/COMPONENTS MUST BE FREE OF DAMAGES, CUTS.
- 8. WEIGHT: 0.19 LBS (86.18g)

TOLERANCES:

Unless otherwise specified:
All dimensions in inches
.X +/- .025
.XX +/- .010
.XXX +/- .005
Angles +/- 1°

THIRD ANGLE PROJECTION



THIS DRAWING IS THE PROPERTY OF SYNQOR INC.
It is not to be reproduced or copied, in whole or in part, or used for furnishing information to others, or for any purpose detrimental to the interests of SynQor. The information shown herein may be protected by patents owned or controlled by SynQor.



155 Swanson Road
Boxborough, MA 01719

ACuQor Input Cable
PN AQ-CBL-INPUT1C

SOURCE: PRO/E CABLEKIT2

SIZE	DATE	DWG. NO.	REV
A	09/26/13	705-1000002	B

SCALE: 3.000 DRAWN: CHECK: SHEET 1 of 1

1

2

3

4